




## Wheeler Model 46800 Hydrostatic Test Pump SPECIFICATIONS

DIMENSIONS:	39" (70cm) L x 19" (60 cm) W x 26" (87.5cm) H
WEIGHT:	203 lbs 104.5 kg
PUMP:	Triple diaphragm: Positive displacement Ports: 1-1/2 " Inlet; 3/4" NPT outlet Capacity: 26gpm Pressure: Maximum of 250psi Operating Speed: 550rrpm Lubrication: Pump: 30 oz 40W Non-detergent oil Gear case: 16oz Gear Oil Shaft Size: 1"
ENGINE:	8hp Briggs & Stratton Intek Pro, 4 cycle, gasoline
CONTROL:	Pressure Relief Valve
PULSATION CONTROL:	N/A
GAUGE:	Glycerin filled, 0-600psi, 0-42 kg
DISCHARGE HOSE:	3/4" x 10' (3m) 1000psi working pressure
INTAKE HOSE:	1" x 10' (3m)

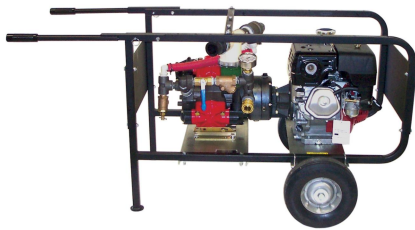

### FEATURES

- ✓ Able to handle up to 10% chlorine solution
- ✓ Automatic and precise pressure build-up
- ✓ Isolates and maintains high pressure
- ✓ Automatic by-pass
- ✓ Constant volume
- ✓ Adjustable pressure control
- ✓ On two wheeled cart with pneumatic tires
- ✓ Inline strainer with stainless steel mesh filter and clear bowl